Built-In Convection Microwave

E30MO65GSS designer series



Microwave shown with Stainless Steel Faceplate



Automatic Mix Cooking

Pre-programmed settings that make it easy to cook with both convection heat and microwave automatically.




Moisture and humidity are detected, which adjusts the cooking time and power level for various foods and quantities.

Convection Cooking

Hot air is circulated throughout the oven cavity to brown and crisp foods evenly. Oven can be programmed for ten convection cooking temperatures for up to 99 minutes, 99 seconds.

| Oven Cavity | 1.5 Cu. Ft. |
|---|-------------------------------|
| Watts | 900 |
| Oven Interior | Stainless Steel |
| Interior Light | Yes |
| Turntable Diameter | 15-3/8" |
| Panel Features | |
| Electronic Clock & Timer | Yes |
| Auto Settings – | |
| Sensor Settings | Yes |
| CompuBake | Yes |
| CompuBroil | Yes |
| CompuRoast | Yes |
| Sensor Reheat | Yes |
| Minute Plus | Yes |
| CompuDefrost | Yes |
| Popcorn Setting | Yes |
| Temperature Control – 100, 150, 275 - 450°F in 25-degree increments | Yes |
| Sensor Convection | Yes |
| Power Ratings | |
| AC Line Voltage | 120V/15 Amps/ 60Hz/AC only |
| Connected Load | 1.55 kW |
| Amps @ 120 Volts | 13 Amps |
| Microwave - Watts@120 Volt Input | 900 Watts |
| Convection - Watts@120 Volt Input | 1450 Watts |
| Frequency | 2450 Mhz |
| Accessories | |
| High and Low Racks | Included |
| Specifications | |
| Oven Cavity Dimensions – | |
| Height | 9-5/8" |
| Width | 16-1/8" |
| Depth | 16-1/8" |
| Cutout Dimensions- | |
| Height | 19-7/8" |
| Width | 26-1/2" |
| Depth | 20-1/8" min. |
| Approved for Under-Counter Installation | Yes |
| Approved for Single Electric Oven Combination Installation | Yes |
| Power Cord Location | Right Bottom Rear |
| Product Weight (Approx.) | 60 Lbs. |
| Shipping Weight (Approx.) | 68 Lbs. |
| Microwave UPC (0-12505-) | 55851-1 |
| Faceplate UPC (0-12505-)* | 55852-8 |

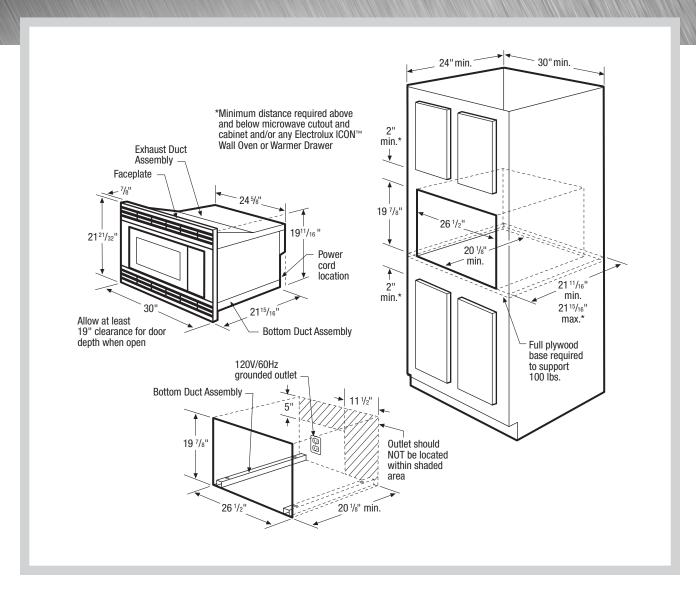

Built-In Convection Microwave Specifications

- Product Weight 60 Lbs.
- Single phase 3-wire, 120 Volt, 60 Hertz AC only electrical supply with ground required on dedicated circuit.
- Connected Load: 120 Volts = 1.55 kW
- Amps @ 120 Volts = 13 Amps
- Always consult local and/or national electric codes.
- Allow 19" minimum clearance for 90° door swing.
- Built-in installation requires use of stainless steel faceplate (E30MO65TMK) and Exhaust Duct Assembly which ship separately.
 Unit can NOT be installed above any gas wall oven.
- Built-In Convection Microwave can be built in alone or is approved to be used in combination with any Electrolux ICON™ Single Electric Wall Oven or Warmer Drawer.

- Minimum 20-1/8" deep oven cutout dimension is critical for proper installation for oven and faceplate to fit flush against cabinet front.
- Full base of solid plywood or similar material required, capable of supporting 100 Lbs.
- Base must be level and front of cabinet square for proper operation.
- Grounded outlet should NOT be located in shaded area, as indicated.
- Minimum distance of 2" required above and below microwave oven and cabinet and/or any Electrolux ICON™ Single Electric Wall Oven or Warmer Drawer.

NOTE: Refer to Product Installation Guide for detailed instructions on the web at electroluxusa.com.