## **FRIGIDAIRE**

# FFHI1832T D/S/P/E



## **AVAILABLE** COLORS







## TOP MOUNT REFRIGERATOR 18.0 CU. FT. TOP MOUNT

#### **PRODUCT DIMENSIONS**

| Height (Including Hinges & Rollers) | 66-5/8″ |
|-------------------------------------|---------|
| Width                               | 30″     |
| Depth (Including Door)              | 30-1/8″ |

#### MORE EASY-TO-USE FEATURES

#### Ice Maker

A built-in ice maker automatically makes and replenishes ice cubes, so you always have ice on hand.

Full-Width Wire Freezer Shelf Gives you a way to organize items in your freezer better so you can find food quickly.

**Reversible Door** Door can be installed to open left or right based on your needs.

**Clear Dairy Bin** Keep foods like butter, cheese and yogurt organized.

#### **CERTIFICATIONS**

#### A.D.A.-Compliant<sup>1</sup>

#### ADA With accessible shelving, and

controls that are positioned within arm's reach and allow one-hand operation, our top-freezer refrigerator is A.D.A.-Compliant.

ENERGY STAR® Most Efficient



<sup>1</sup>When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

## SIGNATURE FEATURES

#### Store-More<sup>™</sup> **Humidity-Controlled Crisper Drawers**

Keep your fruits and vegetables fresh in our humidity-controlled crisper drawers.

### SpillSafe<sup>®</sup> Shelves

Designed to keep spills contained, making cleanup a breeze.

### Store-More<sup>™</sup> **Gallon Door Shelf**

Door storage gives you room for larger items like a gallon of milk.

## **Bright LED Lighting**

Find food faster in your refrigerator and freezer with bright LED lighting.


## FFHI1832T D/S/P/E TOP MOUNT REFRIGERATOR 18.0 CU. FT.

| Door Design   | UltraSoft™  |
|---|---|
| Door Handle Design                                      | Black Stainless (D),<br>Stainless Steel (S),<br>Color-Coordinated (P/E) |
| Cabinet Finish (Textured)                               | Black (D/S),<br>Color-Coordinated (P/E)                                 |
| Door Stops  | Yes   |
| Door Hinge Covers                                       | Black (D/S),<br>Color-Coordinated (P/E)                                 |
| Door Reverse Option                                     | Yes   |
| Rollers – Front/Rear                                    | Fixed/Yes   |
| Sound Package   |   |
| Toe Grille  | Black (D/S),<br>Color-Coordinated (P/E)                                 |
| EFRIGERATOR FEATURES                                    |   |
| Interior Lighting                                       | LED   |
| Refrigerator Shelves                                    | 2 Full-Width SpillSafe®   |
| Deli Drawer   | 1 Half-Width  |
| Wine/Can Rack   |   |
| Store-More™ Crisper Drawers                             | 2 Clear   |
| Humidity Controls                                       | 2   |
| Dairy Compartment                                       | Clear Dairy Door  |
| Door Bins   | 3 Full-Width White  |
| Door Racks  |   |
| Non-Slip Bin Liner                                      |   |
| Tall Bottle Retainers                                   |   |
| Gallon Door Storage                                     | 1   |
| REEZER FEATURES   |   |
| Door Bins   | 2 Full-Width Clear  |
| Door Racks  |   |
| Freezer Shelves   | 1 Full-Width Wire   |
| Factory Ice Maker w/ Large Ice Bin                      | Included (PN# IM116)  |
| Lighting  |   |
| ERTIFICATIONS   |   |
| A.D.A. Compliant <sup>1</sup>                           | Yes   |
| ENERGY STAR® Most Efficient                             | Yes   |
| PECIFICATIONS   |   |
| Total Capacity (Cu. Ft.)                                | 18.0  |
| Refrigerator Capacity (Cu. Ft.)                         | 14.1  |
| Freezer Capacity (Cu. Ft.)                              | 3.9   |
| Power Supply Connection Location                        | Right Bottom Rear   |
| Water Inlet Connection Location                         | Bottom Right  |
| Voltage Rating  | 120V/60Hz   |
| Connected Load (kW Rating) @ 120 Volts <sup>2</sup>     | 0.72  |
| Amps @ 120 Volts  | 6.0   |
| Minimum Circuit Required (Amps)                         | 15  |
| Shipping Weight (Approx.)                               | 205 Lbs.  |
| When properly installed, this model is A.D.Aqualified b |   |

<sup>1</sup>When properly installed, this model is A.D.A-qualified based on the United States Access Boards A.D.A/A.B.A Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.
<sup>2</sup>For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

#### PRODUCT DIMENSIONS


| A-Height (Including Hinges & Rollers) | 66-5/8" |
|---------------------------------------|---------|
| B-Width                               | 30"     |
| C-Depth (Including Door)              | 30-1/8" |
| Depth with Door Open 90°              | 58-1/2" |

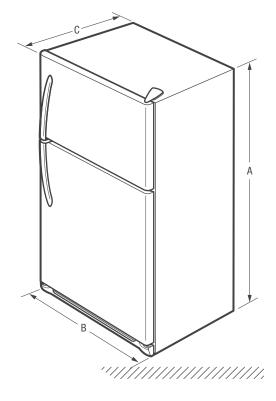

**G₽**° US С

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com. Specifications subject to change. Accessories information available on the web at frigidaire.com

#### FFHI1832T D/S/P/E TOP MOUNT REFRIGERATOR 18.0 CU, FT.

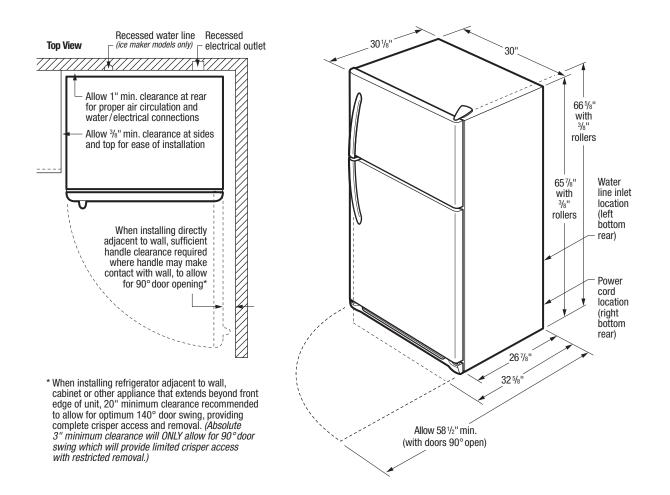

## INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) 205 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating 120V/60 Hz
- Connected Load (kW Rating) @ 120 Volts = 0.72 kW
- Amps @ 120 Volts = 6.0 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- Minimum 3/8" clearance required for sides and top of refrigerator with 1" clearance at rear to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)

- To ensure optimum performance, do not install in areas where temperature drops below 55°F or rises above 110°F and avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.



FRIGIDAIRE

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com. Specifications subject to change. Accessories information available on the web at frigidaire.com

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca