



2 YEARS
WARRANTY

PRODUCTOS
Inspirados
EN
DISEÑOS ITALIANOS

DRIJA

Sicilia 60 DUAL

Estufa Dual para Empotrar
Dual Stove Built-In

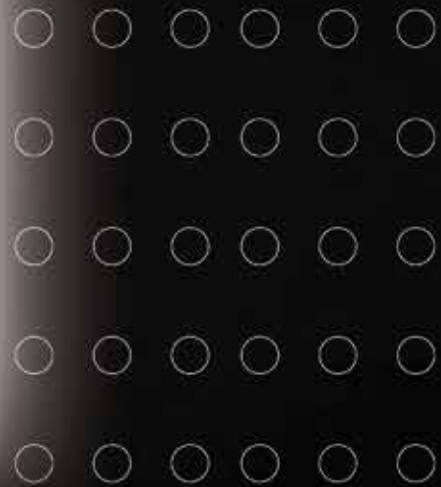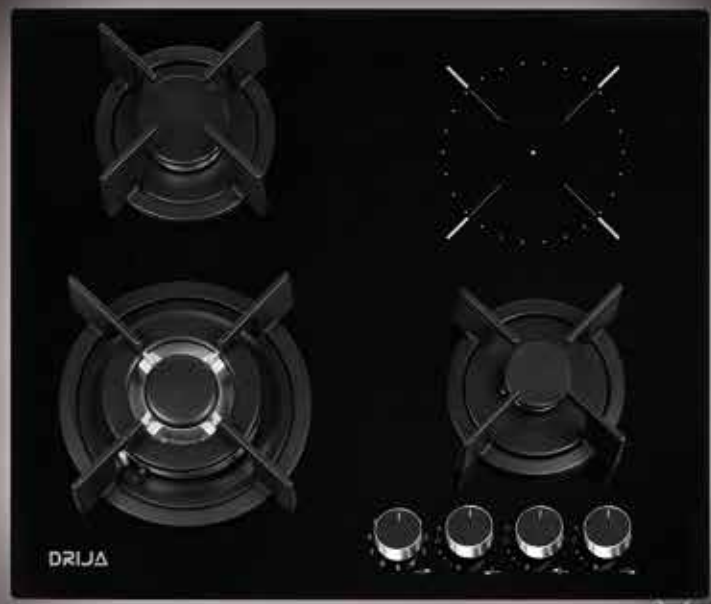

Estufa Dual para Empotrar
Dual Stove Built-In



TUTORIALS OF
TECHNICAL SUPPORT

USER MANUAL

110V / 50-60 Hz

NOTA: Para adquirir accesorios y/o repuestos de este producto, contáctenos al call center (según el número de su país que le indique el certificado de garantía) o a nuestras redes sociales

NOTE: To purchase accessories and / or spare parts for this product, contact us at the call center (depending on the number of your country that indicates the warranty certificate) or our social networks

 www.DrijalInternational.com



Para conservar la garantía de este producto, es recomendable instalarte

Protector de Voltaje

To preserve the warranty of this product, it is advisable to install


Voltage Protector




1. PRODUCT INTRODUCTION.....	2
2. HOW TO USE YOUR APPLIANCE	3
3. CLEANING AND MAINTENANCE.....	5
4. IS THERE A PROBLEM?	8
5. INSTALLATION INSTRUCTIONS FOR BUILT-IN	9
6. BURNERS AND NOZZLE SPECIFICATIONS.....	14

1. PRODUCT INTRODUCTION

TOP VIEW

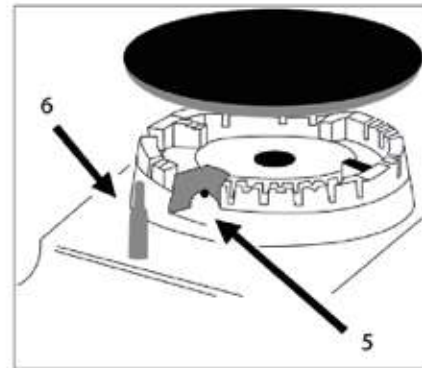

1. Auxiliary burner
2. Semi-fast burner
3. Triple ring wok burner
4. Ceramic burner
5. Ignition for gas burners (only on certain models)
6. Safety device (only on certain models): it is activated if the flame goes out accidentally (spills, drafts, etc.), interrupting the gas supply to the burner.
7. Control knobs for gas burner and ceramic burner

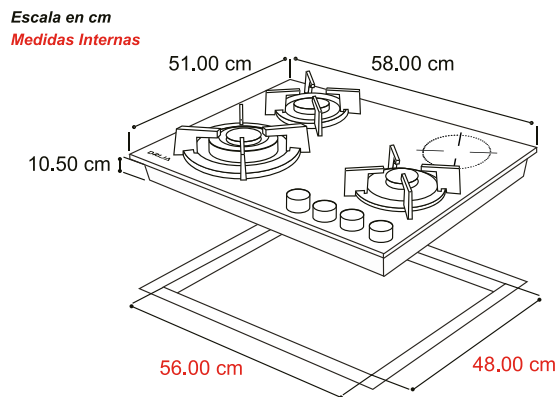



MODELS	SICILIA 60
Cooking Zone	4
Voltage	110V/60Hz
Total Power	7.40kW(it takes approximately 9 minutes and 30 seconds to boil 1L of water)
Front Side control operation	YES
Product Size D×W×H (mm)	580 x 510 x 105
Cut Out Dimensions D x W (mm)	560 x 480

2. HOW TO USE YOUR APPLIANCE

The position of the corresponding gas burner or electric hot plate (if present) is indicated on each control knob.

Gas Burners

The burners differ in size and power. Choose the most appropriate one for the diameter of the cookware being used.

The burner can be regulated with the corresponding control knob by using one of the following settings:

- OFF
- ★ High
- Low

TO TURN ON ONE OF THE BURNERS, place a lighted match or lighter near the burner, press the knob all the way in and turn in the counter-clockwise direction to the "High" setting.

ON THOSE MODELS FITTED WITH A SAFETY DEVICE (F), the knob must be pressed in for about 6 seconds, until the device that keeps the flame lighted warms up.

ON THOSE MODELS FITTED WITH AN IGNITION (D), the "E" ignition button, identified by the ★ symbol, must first be pressed and then the corresponding knob pushed all the way in and turned in the counter-clockwise direction to the "High" setting.

DRIJA

Some models are equipped with an ignition switch incorporated into the control knob. If this is the case, the ignition (D) is present, but not the "E" switch (the ☆ symbol is located near each knob).

To light a burner, simply press the corresponding knob all the way in and, then, turn it in the counter-clockwise direction to the High setting, keeping it pressed in until the burner lights.

CAUTION: If the burner accidentally goes out, turn off the gas with the control knob and try to light it again after waiting at least 1 minute.

TO TURN OFF A BURNER, turn the knob in the clockwise direction until it stops (it should be on the "." setting).

NOTE: This product must be installed with flexible safety hose for gas connection otherwise you will lose the warranty in its entirety.

Ceramic burner



To light the ceramic burner: turn the knob clockwise.

To select a heating level: The number around the outside of the knob indicates the power level that has set the zone. Each cooking zone can be set between 1 and 9, one is the configuration of the coldest zone and nine is the configuration of the hottest zone.

To turn off a burner: turn the knob counterclockwise until it stops (it must be in position 0).

Residual heat indicator: to the left of the control knob, there is a residual heat indicator.

To light the ceramic burner: turn the knob clockwise.

To select a heating level: The number around the outside of the knob indicates the power level that has set the zone. Each cooking zone can be set between 1 and 9, one is the configuration of the coldest zone and nine is the configuration of the hottest zone.

3. CLEANING AND MAINTENANCE

Before cleaning or performing maintenance on your gas hob, disconnect it from the electrical power supply.

To extend the lifespan of the gas hob, it is absolutely indispensable that it is cleaned carefully, thoroughly and usually, please keeps in mind to the following:

- The enameled parts and the top, must be washed with warm water without using abrasive powders or corrosive substances which could ruin them;
- The removable parts of the burners should be washed usually with warm water and soap, make sure to remove caked-on substances;
- Automatic igniter pin, the end must be cleaned carefully and usually, make sure ignition keep working normally.
- Stainless steel top plate and other steel parts can be stained if keep touch with high concentration calcareous water or corrosive detergents (containing phosphorus). To extend the lifespan, we advise these parts be rinsed thoroughly with water and dry them by blowing, It is a good idea to clean up any spills too.
- After hob working, the surface must be cleaned by a damp cloth to remove dust or food residues. Glass surface should be cleaned regularly with warm water and non-corrosive detergent.

First, to remove all food residues or greases with a cleaning scraper, e.g.

Cleaning scraper (not supplied) (Fig. 1).

- While the cooking surface is warm, clean it with a suitable cleaning product and paper towels, then rub with a damp cloth and dry surface. Such as aluminum foil, plastic items, objects made of synthetic material, sugar or foods with a high sugar content that have been melted onto the surface, it must be removed immediately.
- While the cooking surface is still hot, clean it with a scraper and a transparent protective film which prevent to make more dirt. This also protects the surface from damage caused by food with high sugar content.

Do not use abrasive sponges or cleaning products, these holds true for chemically aggressive cleaners, like oven sprays and stain removers (Fig.2);




Fig.1



Fig.2



The settings below are guidelines only. The exact setting will depend on several factors, including your cookware and the amount you are cooking.

Experiment with the electric hob to find the settings that best suit you.

What?	How?	Important!
Everyday soiling on surface (fingerprints, marks, stains left by food onion-sugary spillover son the surface)	<ol style="list-style-type: none"> 1. Switch the power to the electric hob off. 2. Apply an electric hob cleaner while the hob is still warm (but not hot!) 3. Rinse and wipe dry with clean cloth or paper towel. 	<ul style="list-style-type: none"> • When the power to the electric hob is switched off, there will be no 'hot surface 'indication but the cooking zone may still be hot! Take extreme care. • Heavy-duty scourers, some nylon scourers and harsh/abrasive cleaning agents may scratch the surface. Always read the label to check if you're cleaner or scourers suitable. • Never leave cleaning residue on the electric hob: the electric hob: the Surface may become stained.
Spillovers on the power regulating controls	<ol style="list-style-type: none"> 1. Switch the power to the electric hob off. 2. Soak up the spill. 3. Wipe the power regulating control area with a clean damp sponge or cloth. 4. Wipe the area completely dry with a paper towel. 	<ul style="list-style-type: none"> • Make sure you wipe the power regulating control area dry before turning the electric hob back on.

HINTS AND TIPS

Problem	Possible Causes	What To Do
The electric hob cannot be turned on.	No power.	<p>Make sure the electric hob is connected tithe power supply and that it is switched on.</p> <p>Check whether there is power outage in your home or area.</p> <p>If you've checked everything and the problem persists, call a qualified technician.</p>



The surface is being scratched.	Rough-edged cookware. Unsuitable abrasive scourer or cleaning products being used.	Use cookware with flat and smooth bases. See 'Choosing the Right Cookware', See 'Care and Cleaning'.
---------------------------------	---	--

The above are the judgment and inspection of common failures.

Please do not disassemble the unit by yourself to avoid any dangers and damages to the hob.

- Cleaning the grill/pan support, it is recommended to clean it while it is still hot. To move grill away from the hob and put it in sink, remove the food residues or grease first, after grill has cooled, rinse it with water.

GREASING THE GAS VALVES

Over time, the gas valves may be stuck, and it is difficult to turn on/off. For this case, should clean the inside of valve and greased it.

Kind reminder: This procedure must be performed by a technician authorized by the manufacturer.

PRACTICAL ADVICE

PRACTICAL ADVICE ON USING THE BURNERS

For best performance, follow these general guidelines:

- Use the appropriate cookware for each burner (see table) in order to prevent the flame to reach the side of the pot or pan;
- Always use cookware with a flat bottom and keep the lid on;
- When the contents come to a boil, turn the knob to "Low".

Burner	Ø Cookware diameter (cm)
Fast (R)	22 - 26
Reduced Fast (RR)	24 - 26
Semi Fast (S)	16 - 20
Auxiliary (A)	10- 14
Semi-Fischburner (SP)	16 - 20
Triple Crown (TC)	24 - 26
Triple Corona (TC)	24 - 26

To identify the type of burner, refer to the designs in the section entitled, "Burner and Nozzle Specifications".

4. IS THERE A PROBLEM?

If you find gas hob cannot work suddenly or cannot work properly. Before calling customer service for assistance, let us check what we can do.

First of all, check and confirm there have no interruptions to the gas and electrical supplies.

Particularly if the gas valves keeping turn on.

THE BURNER CANNOT BE LIGHTED OR THE FLAME IS NOT UNIFORM AROUND THE BURNER.

Check to make sure that:

- The gas holes on the burner are not clogged;
- All of the movable parts of burners are fixed correctly;
- There is no air flow around the cooking surface.

THE FLAME DO NOT KEEP LIGHTING TO THE BURNER WITH THERMOCOUPLE.

Check to make sure that:

- You press the knob all the way;
- You keep pressing the knob for enough time to activate the thermocouple.
- The gas holes are not clogged in the area corresponding to the thermocouple.

THE FLAME GO OUT WHILE TURN KNOB TO "LOW" SETTING.

Check to make sure that:

- The gas holes are not clogged.
- There is no air flow around the cooking surface.
- The minimum has been adjusted correctly (see the section entitled "Minimum Regulation").

THE COOKWARE IS NOT STABLE.

Check to make sure that:

- The bottom of the cookware is perfectly flat.
- The cookware is centered correctly on the burner.
- The support grids have not been inverted.

After checked all of these, the gas hob still does not work properly, please call the Customer Service Center and inform them of:

--Tile type of problem.

--The gas hob model number (SICILIA 60) as indicated on the packing carton.

Never call the technicians who are not authorized by your supplier, and refuse to use the spare parts which are not from manufacturer.

5. INSTALLATION INSTRUCTIONS FOR BUILT-IN

The following instructions are directed at the qualified installer, so the installation and maintenance procedures may be followed in the most professional and expert manner.

Important: Unplug the electrical connection before performing any maintenance or regular upkeep work.

POSITIONING FOR GAS HOB

Important: this unit may be installed and used only in permanently ventilated rooms.

The following requirements must be observed:

- a) The room must be fitted with a ventilation system which ventilate smoke and gases from combustion to the outside of rooms.

This must be done by hood or electric ventilator.



In a chimney stack or branched flue.




Directly to the Outside

(Exclusively for cooking appliances)

- b) The room must be allowed for the influx of the air which for proper combustion. The air flow for combustion purposes must not less than 2 m³/h per kW of installed capacity. The air supply will be affected by influx from the outside through a duct; its inner cross section is at least 100cm² and must not be blocked accidentally.

The gas hob without safety devices, to prevent flame goes out accidentally, must have ventilation working on twice volume. For example, a minimum of 200 cm² (Fig. 3). Otherwise, the room can be vented indirectly through adjacent rooms which are fitted with ventilation ducts to the outside. Although the adjacent rooms are not shared areas, bedrooms, but fire risk is hidden (Fig. 4).

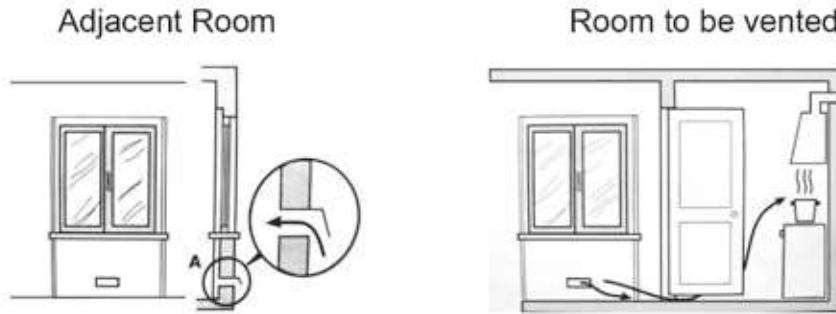

Examples of ventilation holes for carburant air. Enlarging the ventilation slot between window and floor

Fig.3

Fig.4

- c) Intensive and prolonged working of the gas hob that need to intensify ventilation, e.g. opening windows or increasing the power of the air intake system (if present).
- d) Liquefied petroleum gases are heavier than air, so settle it downward. Rooms in which LPG tanks are installed must be fitted with ventilation to the outside to avoid of gas leakage.


Therefore, LPG tanks which are empty or partially full, must not be installed or stored in rooms or spaces below ground level (cellars etc.). It is a good idea to keep only the tank which is working currently in the room, and make sure that it is not closed to heating source (ovens, fireplaces, stoves, etc.).

INSTALLATION OF BUILT-IN GAS HOB

The gas hobs are designed with protection degree against excessive heating, the appliance can be installed next to cabinets, and the height should not exceed the hob.

For a correct installation, the following precautions must be followed:

- a) The hob may be located in a kitchen, a diner or bed/ sitting room, but not in a bathroom or shower room.
- b) The furniture standing near to the unit, it is higher than the working boards, must be placed at least 110mm distance to the edge of the board.
- c) The cabinets should be positioned near to the hood at a height of 420 mm at least (Fig. 5).

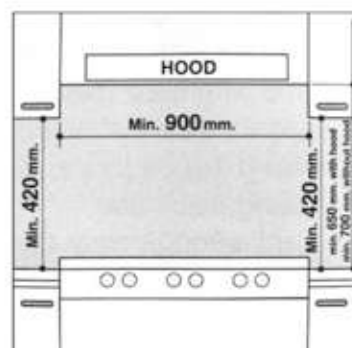

DRIJA

Fig.5

d) Hob should be installed directly under a cupboard; the latter should be at least 700mm from the worktop, as shown in Fig. C.

e) Fixing fittings (hooks, screws) are provided to place the hob on work top, measure 20 to 40 mm in thickness (see Fig. 6).



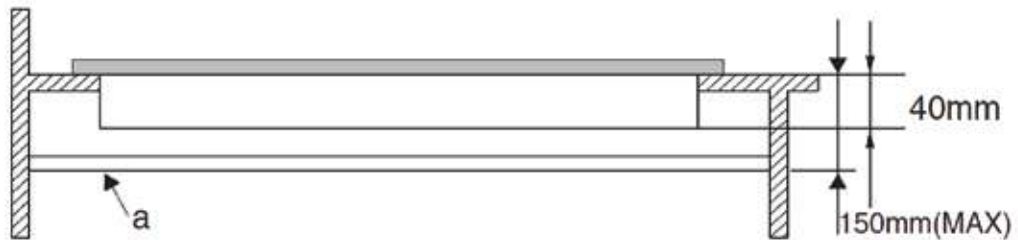


Fig.6

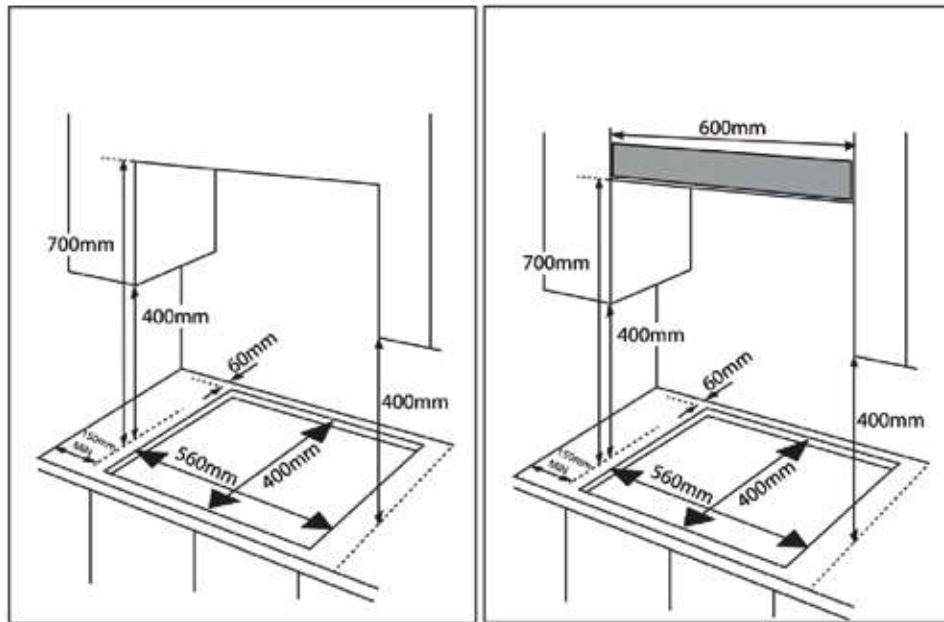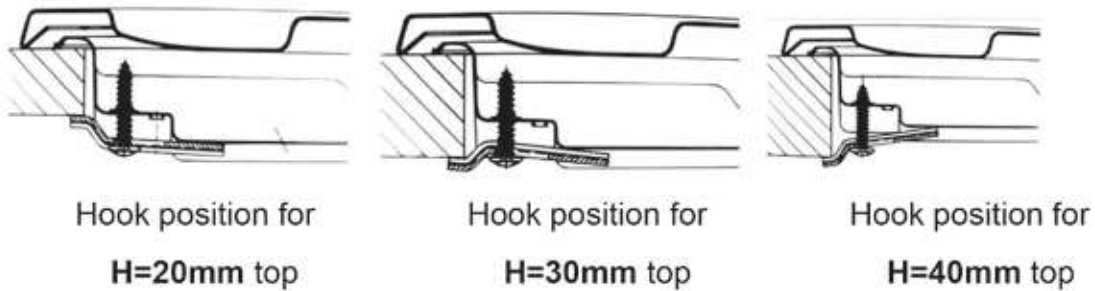

Hook position for
H=20mm top


Hook position for
H=30mm top

Hook position for
H=40mm top



N.B: Use the hooks contained in the "accessories bag"

f) In the event the gas hob is not installed on a built-in oven, a wooden panel must be inserted for insulation. This panel must be placed at least 20 mm distance from the bottom of hob.

IMPORTANT: When installing the hob on a built-in oven, the oven should be placed on two wooden strips; in the case of a joining cabinet surface, remember to leave a space of 45 x 560 mm at least from the back side..



When install hob on a built-in oven without forced ventilation, ensure that have air inlets and outlets to ventilate the interior of the cabinet adequately.



GAS CONNECTION FOR GAS HOB

The gas hob should be connected to the gas-supply by a registered installer. During installation it is essential to fit an approved gas tap to isolate the supply from the hob for the convenience of any subsequent removal or servicing. Connect the hob to the gas mains or liquid gas, it must be carried out according to the prescribed regulation in force, and only after it is ascertained that it is adaptable to the type of gas to be used. If not, follow the instructions indicated in the paragraph headed "Adaptation to different gas types". In the case of connection to liquid gas by tank, use pressure regulators that conform to the regulation in force.

Important: For safety, for the correct regulation of gas use and long life of the hob, ensure that the gas pressure conforms to the indications given in table 1 "Burners and Nozzle Specifications".

CONNECTION TO NON-FLEXIBLE TUBE

(Copper or steel)

Connection to the gas source must be done in such a way as to not create any stress points at any part of the gas hob.

The hob is fitted with an adjustable "L" shape connector and a gasket to the gas supply.

The connector should be dismantled and the gasket must be replaced.

The feeding connector of the gas to the hob is threaded 1/2 gas cylinder.

CONNECTION TO FLEXIBLE STEEL TUBE

The gas feed connector to the hob is threaded, 1/2" connector for round gas pipe. Only use pipes and sealing gaskets that conform to the standards currently in force. The maximum length of the flexible pipes must not exceed 2000 mm. Once the connection has been made, ensure that the flexible metal tube does not touch any moving parts and not be crushed.

CHECK THE SEAL

Once the hob was installed, make sure all the connections are properly sealed, use a soapy water to test, never use flame.

ELECTRICAL CONNECTION

The hob fitted with a tripolar electrical supply cord which is designed to be used alternating current .According to the indications on the rating plate located under the hob. The earthing wire can be identified by its yellow-green color.

In the case of installation over a built-in electric oven, the electrical connections for the hob and oven should be independent, not only for safe purpose, but also be convenient to remove them in the future.

ELECTRICAL CONNECTION FOR GAS HOB

Fit the supply cord with a standard plug for the demand rate indicated on the rating plate or connect it directly to the electrical mains. In the latter case, a single pole switch must be placed between the hob and the mains, with a minimum opening between the contacts of 3 mm in compliance with current safety codes (the earthing wire must not be interrupted by the switch). The power supply cord must be positioned so that it does not reach a temperature in excess of 50°C than room temperature at any point.

DRIJA

Before actual connection make sure that:

- Put a voltage protector.
- The fuse and electrical system can withstand the load required by the hob;
- The electrical supply system is equipped with an efficient earth hook-up according to the norms and regulations prescribed by law;
- The plug or switches are easily accessible.

Important: the wires in the main lead are colored in accordance with the following code:

Green & Yellow - **Earth**

Blue - **Neutral**

Brown - **Live**

As the colors of the wires in the main lead may not correspond with the colored markings identifying the terminals in your plug, proceed as follows: Connect the Green & Yellow wire to terminal marked "E" or \perp or colored Green or Green & Yellow.

Connect the Brown wire to the terminal marked "L" or colored Red.

Connect the Blue wire to the terminal marked "N" or colored Black.

6. BURNERS AND NOZZLE SPECIFICATIONS


ADAPTING THE GAS HOB FOR DIFFERENT TYPES OF GAS

Burner	G20		G30	
	Thermal power (kW)	Nozzle 1/100 (mm)	Thermal power (kW)	Nozzle 1/100 (mm)
Auxiliary (Small) (A)	1.0	71	1.0	52
Semi rapid (Medium)	1.80	97	1.8	67
Rapid (R)	2.40	110	2.40	77
Triple Ring (TR)	3.40	125	3.40	93
Supply pressures	20mbar		30mbar	



At 15°C and 1013 mbar - dry gas

P.C.I.G20	37.78 MJ/m ³	P.C.I.G25.1	32.51 MJ/m ³
P.C.I.G25	32.49 MJ/m ³	P.C.I.G27	30.98 MJ/m ³
P.C.I.G2.350	27.20MJ/ m ³	P.C.I.G30	49.47MJ/Kg



Replacement of burner nozzle: loosen the nozzle with a dedicated wrench (7).Fit the new nozzle according to the required gas type (see table 1 for reference) .

After you have converted the gas hob to another gas type, make sure you have placed a label containing that information on the appliance.

HOW TO CONVERT GAS SOURCE
ADJUSTMENT OF THE REDUCED VALVE FLOW

Burners	Flame	Converting the hob from LPG to natural gas	Converting the hob from natural gas Gas to LPG
Regular burners	Full flame	Replace the burner Nozzle according To the guidelines in table 1	Replace the burner Nozzle according to the guidelines in table 1
	Saving flame	Loosen the adjustment Spindle (see fig.7 below) And adjust the flame	Loosen the adjustment Spindle (see fig.7 below) And adjust the flame

VALVE ADJUSTMENT

Valve adjustment should be done with the control knob set at Burner ON saving flame position. Remove the knob, and adjust the flame with a tiny screwdriver (see fig.7 below).

DRIJA


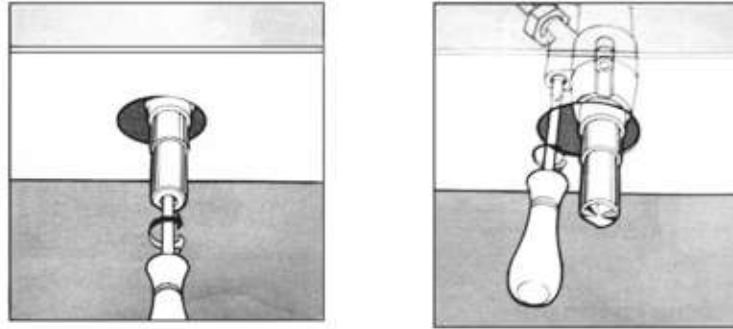


Fig.7

To check the adjusted flame: heat the burner at full open position for 10 minutes. Then turn the knob into the saving setting. The flame should not extinguish nor move to the nozzle. If it extinguish or moves to the nozzle, readjust the valves.

FLAME SELECTION

As the burners are adjusted correctly, the flame should be light blue, and the inner flame should be clear. The size of flame depends on the position of the related control knob.

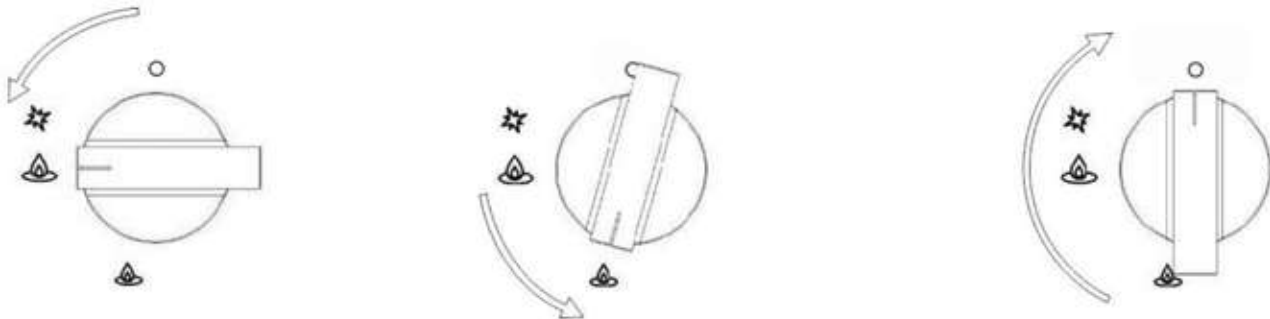

-Burner ON, large flame

-Burner ON, small flame (saving mode)

-Burner OFF

Fig.8

See fig.8 for various operating options (flame size selection); the burner should be set at a large flame during the initial phase of cooking, it make food boil quickly. Then should turn knob to the saving flame position to maintain the cooking. It is possible to adjust the flame size steeples.

It is prohibited to adjust the flame between the Burner OFF and Burner ON large flame positions.

High quantity of energy can be conserved if the hob is used correctly, parameters are designed correctly, and appropriate cookware is used. The energy conservation be as follows

:

- Up to 60% are conserved when proper pots are used,




· Up to 60% are conserved when the unit is operated correctly and the suitable flame size is chosen.

It is a prerequisite for efficient and energy-saving operation of hob that the burners are kept clean at all times (in particular the flame slots and nozzles). Adapting to different types of gas

NOTICE :

- A. Prior to installation, ensure that the local distribution condition (nature of the gas pressure) and the adjustment of the appliance are compatible.”
- B. “The adjustment conditions for this appliance are stated on the rating label.”
- C. “This gas hob is not connected to combustion products evacuation device. It shall be installed and connected in accordance with current installation regulations. Particular attention shall be given to the relevant requirement regarding ventilation.”
- D. “CAUTION: The use of a gas hob lead to the production of heat, moisture and products of combustion in the room in which it is installed. Ensure that the kitchen is well ventilated especially when the hob is in working: keep natural ventilation holes open or install a mechanical ventilation device.”

 <p>DISPOSAL: No Remove this item as municipality Waste.</p> <p>Collection of Waste separately For special treatment it is necessary.</p>	<p>That stove is labeled in accordance with European Directive 2012/19 / EU for Waste Electrical and Electronic Equipment (WEEE). Ensuring that this appliance is disposed of correctly, you will help prevent any possible damage to the environment and human health, which could otherwise be caused if it were eliminated in the Wrong Way.</p> <p>The symbol indicates that the product cannot be treated as normal waste. It should be a collection point for the recycling of electrical and electronic products.</p> <p>This stove requires special disposal. For more information about treatment, recovery and recycling of this product, please contact your local council, your household waste disposal service or the shop where you bought it.</p> <p>For more detailed information about treatment, recovery and recycling of this product, please contact your local city office, service household waste disposal service or the shop where you purchased the product.</p>
--	--